Wunder-Bar Food & Beverage Dispensing Systems

CB-250-*

JOB:_____ **ITEM:**_____

1/4 HP CHILL BOSS BEVERAGE CHILLER

*** 1 = One Pump**

REFRIGERATION: 1/4HP, R134a Condensing Unit

NOTE: 6" clearance required on three sides for optimum air flow maintenance.

ELECTRICAL:

No Pump: 115 Volt AC, 60 hZ, 1 phase, 6.4 Full Load Amps
Dedicated 10 Amp circuit is required
Maximum Fuse / HACR Breaker: 10 Amp
Includes six foot grounded cord with NEMA 5-15P plug

One Pump: 115 Volt AC, 60 hZ, 1 phase, 8.1 Full Load Amps
Dedicated 10 Amp circuit is required
Maximum Fuse / HACR Breaker: 10 Amp
Includes six foot grounded cord with NEMA 5-15P plug

COOLING CIRCUITS: Two 24 foot long 1/4" ID, with 3/8" Barbed Inlet/Outlet Fittings.

DIMENSIONS:
Height: 24"
Width: 20"
Depth: 12"

WEIGHT:
Empty: 65#
Operating: 100#
Shipped: 90#

ICE BANK CAPACITY: 4 U.S. Gallons of Tap Water

PERFORMANCE: Two, 12 ounce drinks per minute at less than 40º F, 120 twelve ounce continuous drinks until ice bank depletion (1440 ounces total)

MAXIMUM TUBING LENGTH: 6' direct draw, or 25' with submersible pump option (p/n CB-250-SP)

OPTIONS: 6" Adjustable Legs (up to 7") (p/n CB-250-LS)

Includes: Six-foot long cord with NEMA 5-15P, grounded plug.

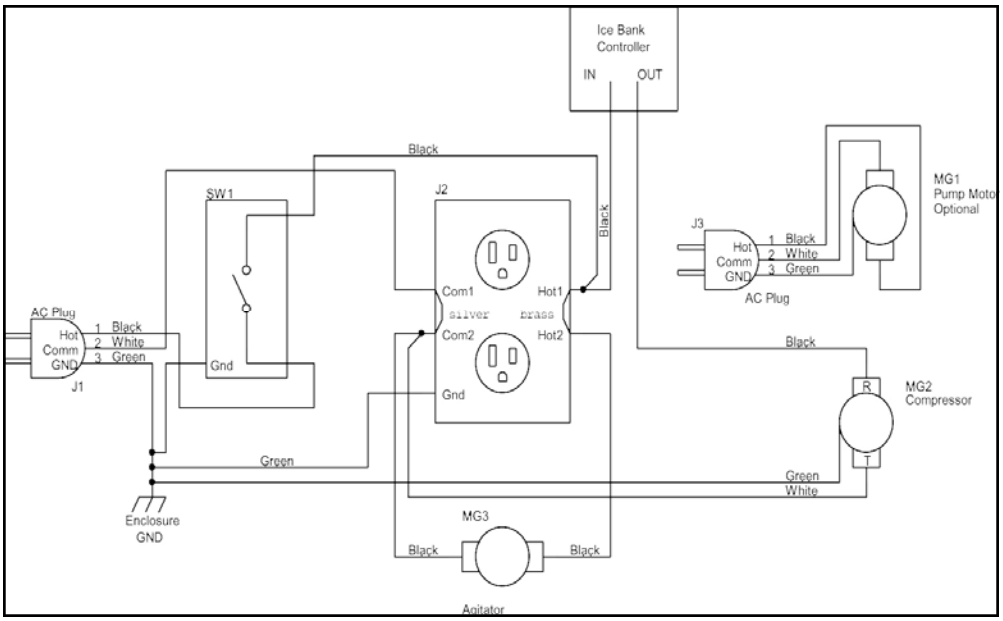

AUTOMATIC BAR CONTROLS, INC. 790 Eubanks Drive Vacaville, California 95688 (707) 448-5151
Setting the standards for over thirty five years. Facsimile (707) 448-1521